



Description

The EasyDrive™ Nylon Drive Anchor is a removable light duty, impact/rotation setting, interference fit anchor, designed for use in a variety of substrates such as concrete, stone, solid brick, solid block, hollow brick, hollow block and hollow slab.

Specification

Material - Sleeve	Nylon
Material - Drive Screw	Carbon Steel, Stainless Steel 316 (A4)
Corrosion Protection	Zinc Plating
Head Style - Drive Screw	Countersunk
Fixing Method	Through Fixture
Setting Method	Impact/Rotation
Anchoring Method	Interference Fit
Drilled Hole Diameters	5mm, 6mm, 8mm
Anchor Lengths	33mm, 42mm, 50mm, 55mm, 70mm, 75mm, 120mm
Maximum Fixture Thickness	6mm, 12mm, 25mm, 30mm, 40mm, 75mm
Substrates	Concrete, Stone, Solid Brick, Solid Block, Hollow Block, Hollow Slab, Hollow Brick



Features & Benefits

- The innovative design of the EasyDrive™ ensures that it can be hammered all the way into the hole without pre-expansion.
- The drive screw's saw tooth thread makes it easy to drive and unscrew.
- A wide, flat collar with collapsable sleeve design, ensures tight fixing.
- Nylon body provides insulation between drive screw and work surface.

Related Products

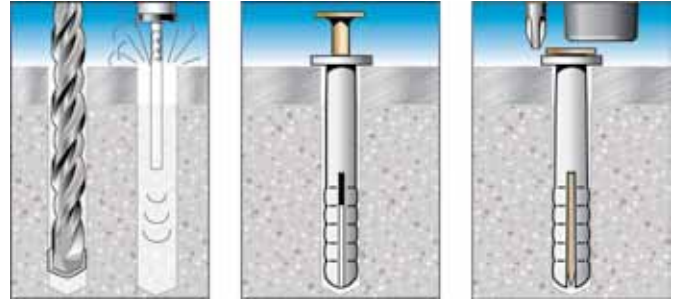
DynaDrill™ / Hammer Drill Driver	Drill Driver
Carbide Drill Bits	Screw Gun
Hole Cleaning Brush	Screwdriver Bits
Hole Cleaning Pump	
Wet and Dry Vacuum	

Trades & Applications

	Electrical Contractor	Bricklayer	Plumbing Contractor
Electrical Fitting Installation	✓		
Brick Tie Installation		✓	
Pipe/Conduit Saddle Installation	✓		✓

Installation

1. Drill a hole to the recommended diameter and depth using the fixture as a template. If the fixture thickness is less than the maximum, increase the hole depth accordingly. Remove the debris with a hand pump, compressed air, or vacuum.
2. Insert the anchor through the fixture until the collar of the anchor contacts the fixture.
3. Screw or tap home the drive screw with a hammer until the head is flush with the collar of the anchor. The drive screw can easily be removed with a screwdriver.


Light Duty Anchors


EasyDrive™ Nylon Anchors - Zinc Plated Drive Screw

Part No	Anchor Size (mm)	Max Fixture Thickness (mm)	Overall Anchor Length (mm)	Drilled Hole Ø (mm)	Min Hole Depth (mm)	Order Qty
ED05033	5	6	33	5	40	100
ED05050	5	20	50	5	45	100
ED06042	6	12	42	6	50	100
ED06055	6	25	55	6	50	100
ED06075	6	40	70	6	50	100
ED08080	8	30	75	8	80	50
ED08120	8	75	120	8	95	50



EasyDrive™ Nylon Anchors - Stainless Steel AISI 316 (A4) Drive Screw

Part No	Anchor Size (mm)	Max Fixture Thickness (mm)	Overall Anchor Length (mm)	Drilled Hole Ø (mm)	Min Hole Depth (mm)	Order Qty
ED05033SS	5	6	33	5	40	100
ED06042SS	6	12	42	6	50	100
ED06055SS	6	25	55	6	50	100
ED06075SS	6	40	70	6	50	100